

# M2903CD

## Electro-mechanical asymmetric lift with chain drive

Safety nut  
Automatic arm locking device  
Dead man controls, 24 volt  
Buzzer on last portion of descent stroke  
Electromechanical safety device  
Automatic lubrication

Complete with 60mm and 100mm pad height adapters

**SPECIAL OFFER**  
INCLUDES 60MM & 100MM  
PAD HEIGHT ADAPTORS



**BRADBURY**

**EQUIPMENT**

# Bradbury M2903CD


## Electro-mechanical asymmetric lift with chain drive

### Technical data

<b>Pad height adapters</b>	<b>Complete with 60 mm &amp; 100 mm</b>
Operation	Electro mechanic
Capacity	3000 kg
Weight	680 kg
Lifting/lowering	55 seconds
Lifting height	1890 mm
Motor	4,5 kW - 3ph. 230-400V/50Hz
Concrete	35N/mm <sup>2</sup> strength 150 mm minimum thickness Withstand 3.0 tonne static load Withstand 6.0 tonne shock load

### Application

Car service bays  
 Brake repairs and service  
 Suspension replacement  
 Transmission repair and replacement  
 Tyre shop  
 General repair bay

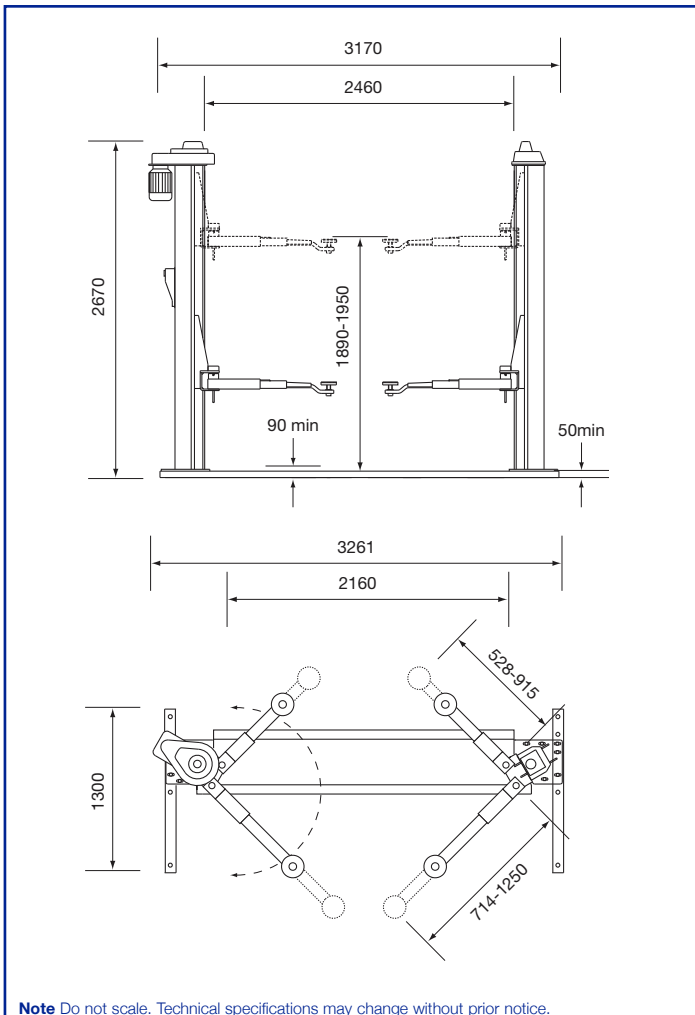

### Optional accessories

#### Lighting Kit



#### Pad height adapters 20mm & 170mm



### Other products in Bradbury's quality range

Two post lifts  
 Four post lifts  
 Scissor lifts  
 Commercial vehicle lifts  
 VI approved MOT equipment  
 Roller brake testers for both car and commercial vehicles  
 Jacking beams

#### Bradbury Equipment

153-165 Bridge Street Northampton NN1 1QG  
**T** +44(0) 1604 828 648  
**F** +44(0) 1604 609 684  
**E** sales@bradburyequipment.co.uk

**Registered office** 153-165 Bridge Street Northampton NN1 1QG  
**Registered in England** 4666699



FS 23808

M2903CD - 24:07:09

**Note** Do not scale. Technical specifications may change without prior notice.